

GM

Compact Undercounter
Glasswasher / Dishwasher

STARLINE by WASHTECH



STANDARD FEATURES

- 1, 2 and 3 minute cycles
- Compatible with 435mm to 450mm racks
- Touchscreen controls providing advanced customisation
- 0.3HP soft start wash pump
- Dual chemical pumps
- Assured rinse c/w break tank and booster pump
- Polish-free glasswashing compatible
- Hands-free drainage system with sump and drain pump
- Adjustable tilting rack slide
- Heavy-duty stainless steel construction
- Lower stainless steel wash and drain filter basket
- Updatable power for rapid rinse recovery

- 1x 450mm dish rack (600 70081)
- 1x 450mm cup rack (600 70080)
- 1x cutlery container (C660503)

SPECIFICATIONS

A - Water[^]


Temperature	20-65°C*
Connection	3/4" male, hose supplied
Pressure	100-350kPa
Flow	10L per minute
Backflow prevention	Atmospheric vacuum breaker
Consumption	2.4L per cycle

D - Drainage

Drain pump flexi-hose	25mm
-----------------------	------

C - Electrical

V	Hz	A/ph	Max kW	
Single phase	230	50	15	3.15
Single phase	230	50	25	6.15
Three phase	400	50	15	9.00

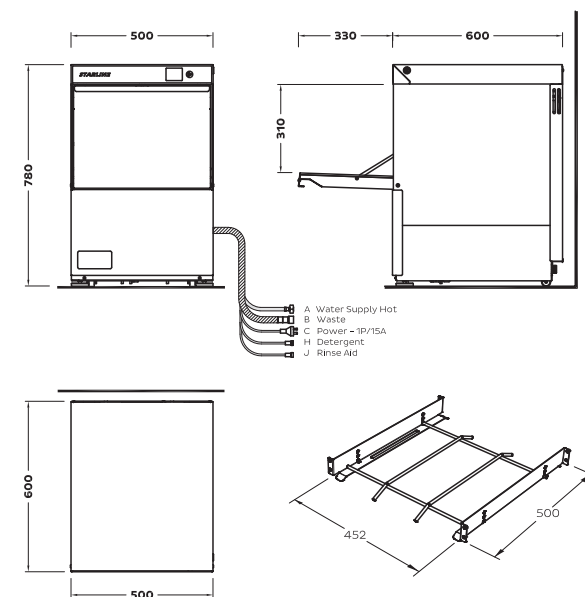

Dimensions

	Machine	Packed
Width (mm)	500	560
Depth (mm)	600	650
Height (mm)	780	915
Weight (kg)	47	57
Volume (m3)		0.33

Water Quality

	Min	Max
pH	7	8
Hardness	20	100
Cl-		100
SO4		400
Fe		0.1
Mn		0.5
Cu		0.05
Cl2		0.1

*Suitable for cold water supply although to avoid excessive delays between cycles a 1p/25A or 3p/15A power supply is recommended. Isolating switch must be within 1m of, and not directly behind, the machine. Refer to operator manual for installation instructions.

[^]Upgrade kit available to enable switchable inlet water and on-demand selection of polish-free mode using cold RO water (requires a Starline ROC), and high capacity mode using a standard hot water feed.

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.