

PART #A200815

# Wire Shelving ASSEMBLY INSTRUCTIONS

## CAUTION

INSPECT CONTENTS IMMEDIATELY AND FILE CLAIM WITH DELIVERING CARRIER FOR ANY DAMAGE.  
**SAVE YOUR BOX AND ALL PACKING MATERIALS.**  
YOU ARE RESPONSIBLE FOR DAMAGE TO YOUR UNIT IF RETURNED IMPROPERLY PACKED.

### BEFORE ASSEMBLY, PLEASE READ:

#### Helpful Suggestions:

- Shelves up to 48" in length can support an evenly distributed static load of 800 lbs.
- Shelves of 54", 60", and 72" length can support an evenly distributed static load of 600 lbs.
- **IMPORTANT:** Shelving units should not exceed 2400 lbs. per set of four posts.
- Large installations are easier if all posts are marked first. Lay posts on floor with leveling bolts against a wall or straight edge. Mark all posts using a magic marker or grease pencil.

#### For Best Performance:

- Units over 50" high should be assembled with no less than 3 shelves—preferably 4 or more—and the bottom shelf should be placed as low as possible or practical.
- On mobile units with 18"-wide shelves, the overall post height should be no greater than 74".
- On mobile units with 24"-wide shelves, the overall post height should be no greater than 86".


## FOR STARTER UNITS:

(For Mobile Units, see back page on how to install casters BEFORE assembling unit.)

### Step 1 - Attach split sleeves (for bottom shelf) to posts.

- The wider part of the taper goes toward the bottom.
- Make sure rib on split sleeve is seated into a groove on the post.

Note: The number covered by the split sleeve indicates approximate height of shelf.

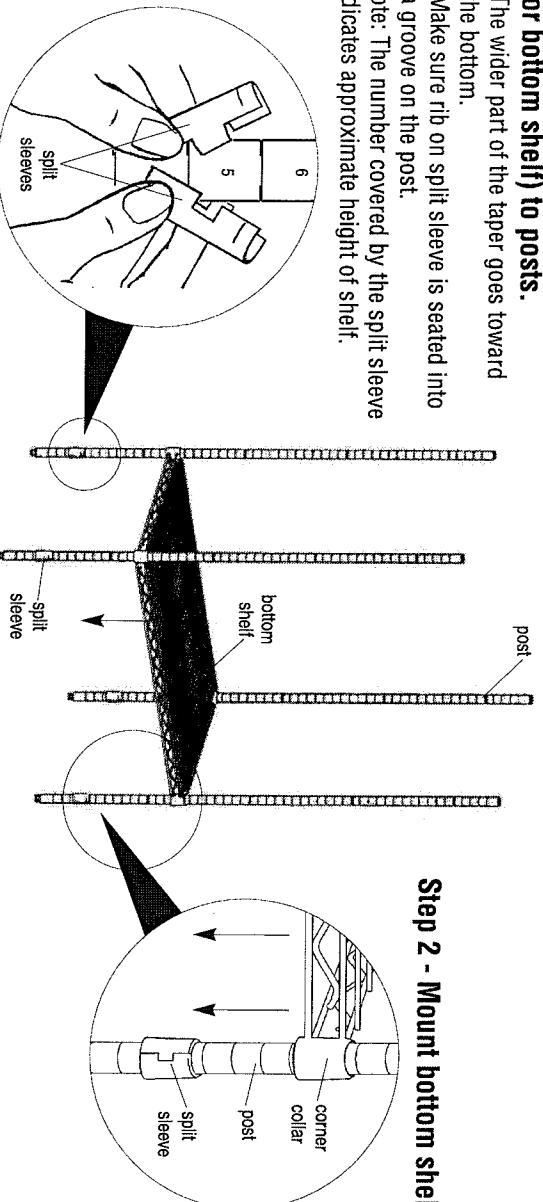

### Step 2 - Mount bottom shelf.


(continued on page 2)

## Wire Shelving ASSEMBLY INSTRUCTIONS

### FOR STARTER UNITS (continued):


#### Step 3: Mount additional shelves.

Refer to Steps 1 & 2 (front page), working from bottom to top.

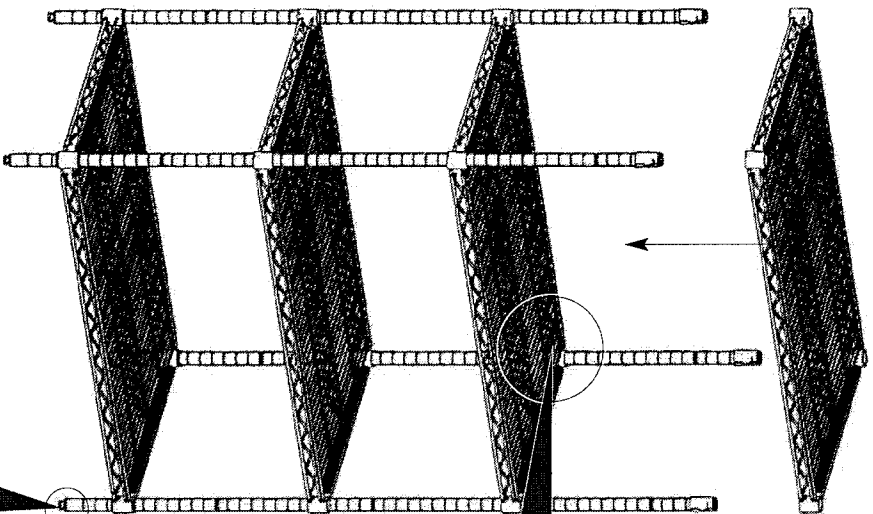



#### Step 4: Securely seat all shelves.

Note: Do NOT hammer directly on wire or corner.

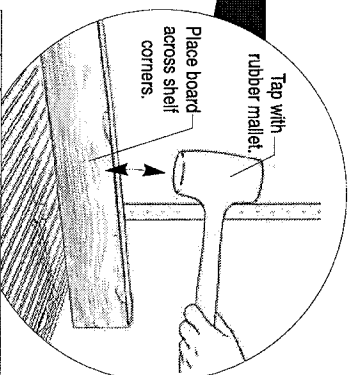

#### ~~If using aluminum split sleeves:~~

- ~~Make sure the groove located on the top of split sleeve is accessible.~~
- ~~Gently tap the retaining ring into the outer groove of each split sleeve.~~



#### Step 5: Level unit.

The leveling bolts allow approximately 1/2" adjustment.

(End)

### WARNING – TIPPING HAZARD

- Use caution when moving heavily loaded carts. Heavy loads are hard to control.
- Do not step, stand or climb on shelving units.
- Place heavy objects on lowest shelf.

*Failure to follow these guidelines can result in property damage or personal injury.*

For Add-on Units, see page 3.

For Mobile Units, see back page.